


Bioengineering 208

Magnetic Resonance Imaging

Winter 2007
Lecture 6

- RF Coils
 - MR signal detection
 - Reciprocity
 - Coil Q and Noise
 - Classes of RF coils
 - Coil Geometry


MR Signal Detection

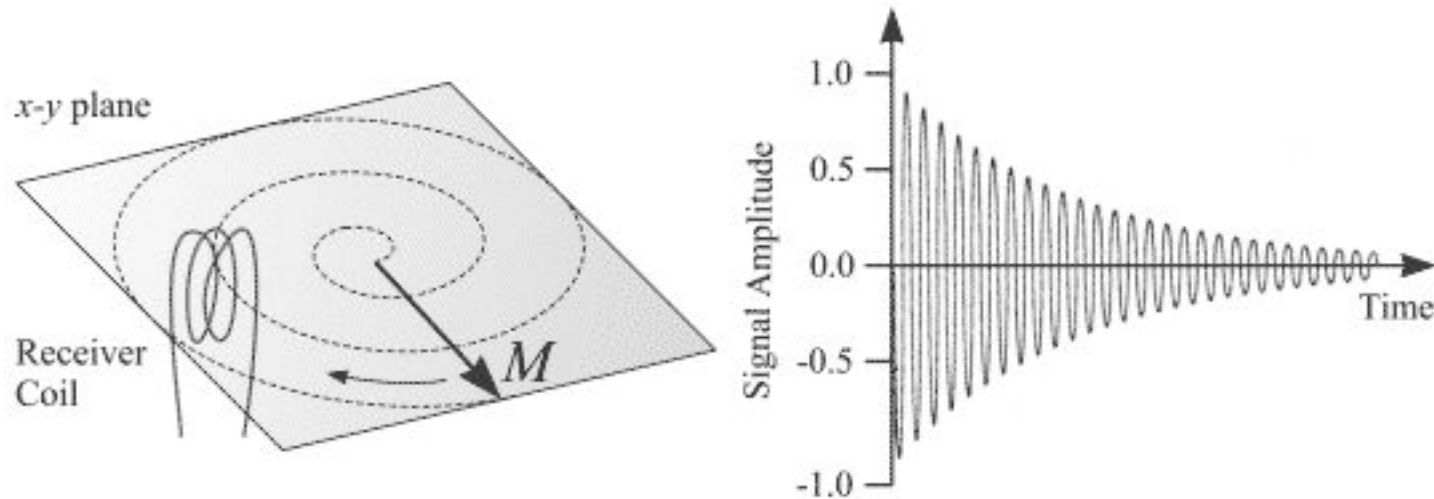

Faraday's Law of Induction:
$$\oint_C \mathbf{E} \cdot d\mathbf{l} = - \frac{d}{dt} \int_S \mathbf{B} \cdot d\mathbf{A}$$

Reciprocity

The spatial distribution the sensitivity of an RF coil is proportional to the field generated by a unit current flowing in the coil

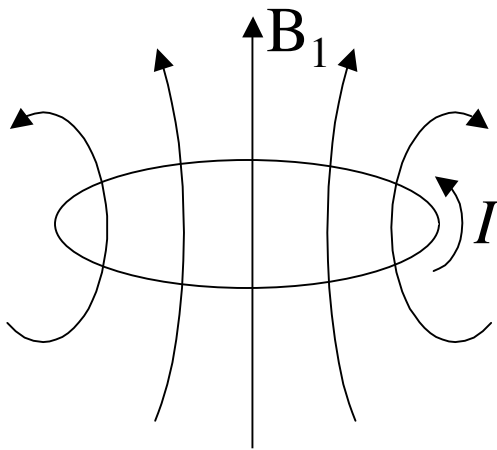


If unit current I produces a transverse RF field B_1 , then transverse magnetization M_{xy} induces:

$$\text{Voltage} \propto \int B_1(r) \cdot M_{xy}(r) dV$$


Note: Only transverse components of B_1 and M count

For (a lot) more details, see: http://coecs.ou.edu/Tamer.S.Ibrahim/Reciprocity_In_MRI.htm


RF Coil Basics

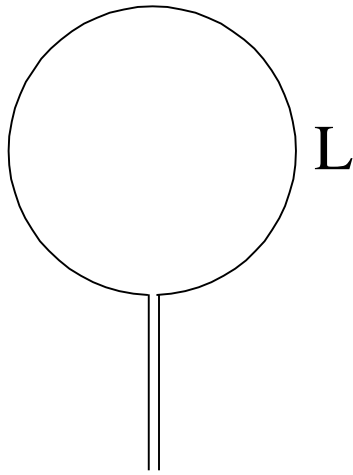

$$Z=R+j\omega L$$
$$\sim (1+100j)\Omega$$

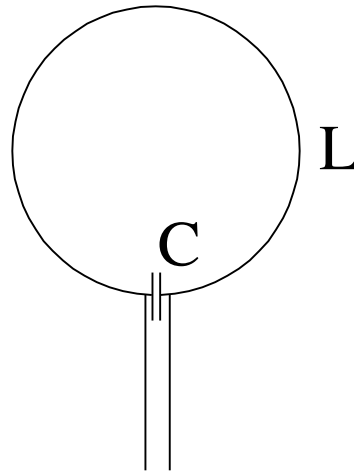


$$Z=R+j(\omega L-1/\omega C)$$
$$\sim 1\Omega \text{ (tuned to } \omega_L)$$

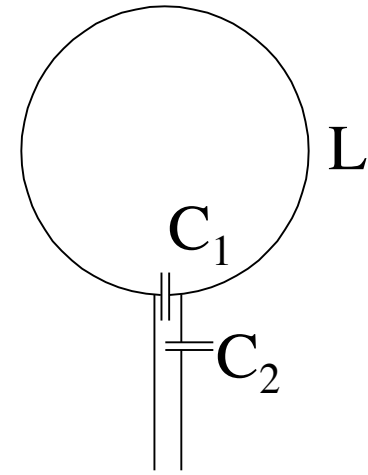

Z can be tuned to ω_L
and matched to 50Ω


C2 represents “Capacitive Coupling”
Inductive Coupling is also useful

RF Coil Q

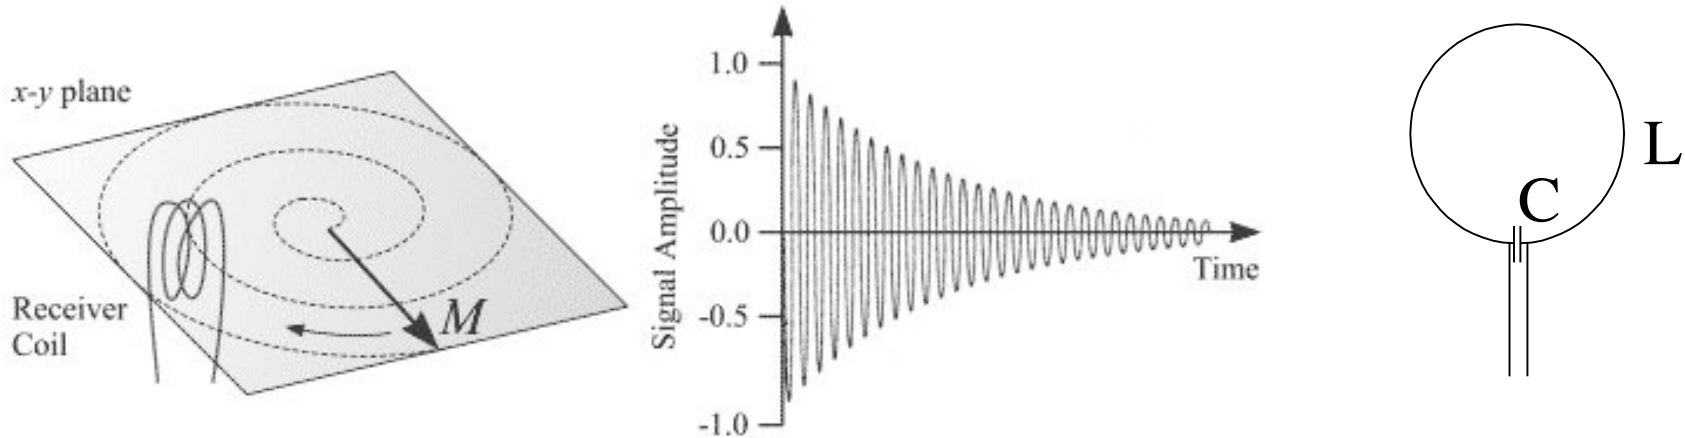

- Definition: $Q = \#$ oscillations before amplitude $\rightarrow 1/e$
 - or: $1/(\text{fractional energy loss per oscillation})$
- $Q(\text{spins}) = \omega_L T_2 \sim 10$ million
- $Q(\text{coil+sample}) \sim 20-500$
- Therefore: spins **cannot** be closely coupled to coil
- So, what limits coil Q ?

Coil losses and Sample losses

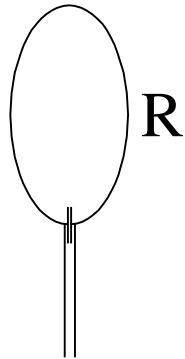

$$\frac{1}{Q_{total}} = \frac{1}{Q_{coil}} + \frac{1}{Q_{sample}}$$

- Sample losses are not from spins, but from random thermal motion of ions in sample
- Goal: minimize noise by minimizing losses
- Not much control over Q_{sample}
- Try to get $Q_{coil} \gg Q_{sample}$
- Maximize: $\frac{B_1(ROI)}{\int |B_1| dV}$ (roughly)


Classes of RF coils

- Transmit Only: Used only to apply RF pulses - typically large with uniform B_1
- * Receive Only: Used only to receive RF signal - optimized for high sensitivity
- * Transmit / Receive: Apply RF pulses and receive signal through same coil
- * Multicoil Arrays: Typically Receive Only, used to increase sensitivity over large ROI

* These need active and/or passive T/R switching


RF Coil Geometries

- Surface Coil:




Where is B_z ?

- Quadrature Surface Coil:

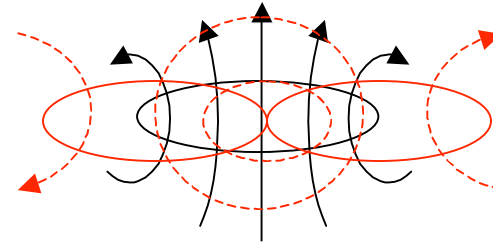

- Solenoid:

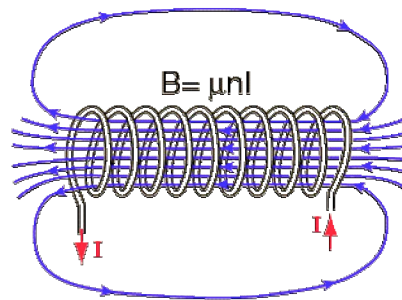

- Birdcage Coil:

