

Bioengineering 208 Magnetic Resonance Imaging


Winter 2007 Lecture 1

Topics:

- Review of NMR basics
- Hardware Overview
- Quadrature Detection

E. Wong, BE208, UCSD Winter 2008

Boltzmann Distribution

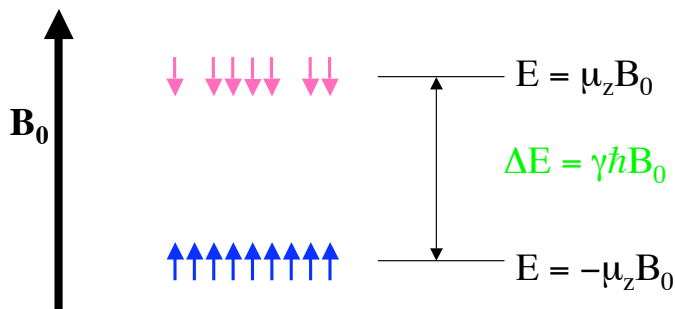

$$\frac{\text{Number of Spins Down}}{\text{Number of Spins Up}} = e^{-\Delta E/kT}$$

Ratio = 0.999990 at 1.5T !!!

Corresponds to an excess of about 10 up spins per million

Magnetization Vector


Vector sum of the magnetic moments over a volume.

For a sample at equilibrium in a magnetic field, the transverse components of the moments cancel out, so that there is only a longitudinal component.

Equation of motion is the same form as for individual moments.

$$\mathbf{M} = \frac{1}{V} \sum_{\text{protons in } V} \mu_i$$

$$\frac{d\mathbf{M}}{dt} = \gamma \mathbf{M} \times \mathbf{B}$$

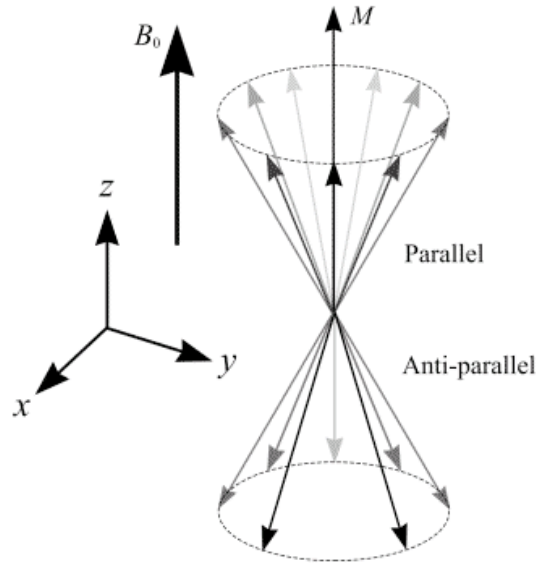

<http://www.easymeasure.co.uk/principlesmri.aspx>

E. Wong, BE208, UCSD Winter 2008

Slide Credit: T.T. Liu

RF Excitation

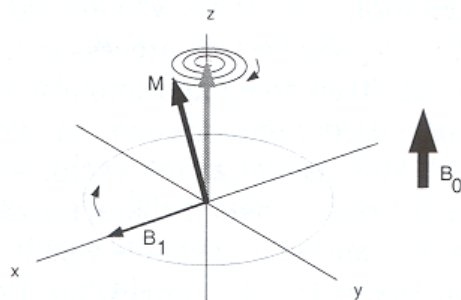


Image & caption: Nishimura, Fig. 3.2

At equilibrium, net magnetization is parallel to the main magnetic field. How do we tip the magnetization away from equilibrium?

B_1 radiofrequency field tuned to Larmor frequency and applied in transverse (xy) plane induces nutation (at Larmor frequency) of magnetization vector as it tips away from the z -axis.

- lab frame of reference

<http://www.eecs.umich.edu/%7Ednoll/BME516/>

E. Wong, BE208, UCSD Winter 2008

Slide Credit: T.T. Liu

Bloch Equation


$$\frac{d\mathbf{M}}{dt} = \underbrace{\mathbf{M} \times \gamma\mathbf{B}}_{\text{Precession}} - \underbrace{\frac{M_x\mathbf{i} + M_y\mathbf{j}}{T_2}}_{\text{Transverse Relaxation}} - \underbrace{\frac{(M_z - M_0)\mathbf{k}}{T_1}}_{\text{Longitudinal Relaxation}}$$

$\omega_0 = \gamma\mathbf{B}$

$\mathbf{i}, \mathbf{j}, \mathbf{k}$ are unit vectors in the x,y,z directions.

Relaxation: Z-component

$$M_z(t) = M_0 + (M_z(0) - M_0)e^{-t/T_1}$$

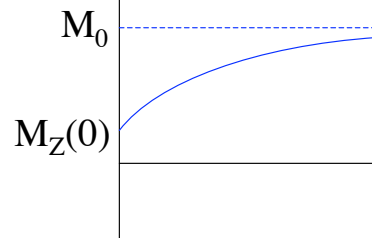


Relaxation: Transverse Component

$$M \equiv M_x + jM_y$$


$$\begin{aligned} dM/dt &= d/dt(M_x + iM_y) \\ &= -j(\omega_0 + 1/T_2)M \end{aligned}$$

$$M(t) = M(0)e^{-j\omega_0 t} e^{-t/T_2} \quad \omega_0 = \gamma\mathbf{B}$$



Relaxation: Summary

- 1) Longitudinal component recovers exponentially.
- 2) Transverse component precesses and decays exponentially.

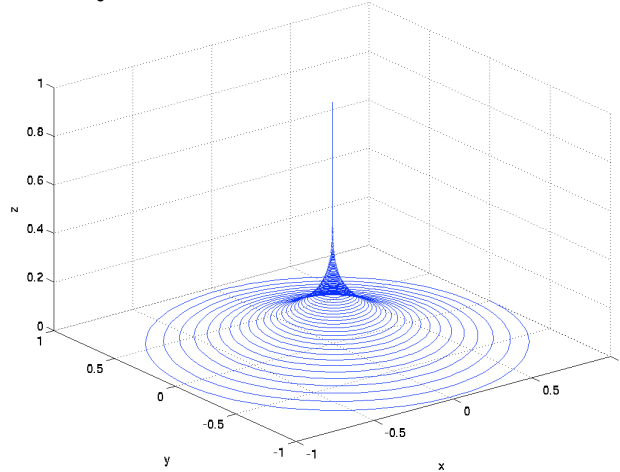


E. Wong, BE208, UCSD Winter 2008

Slide Credit: T.T. Liu

Basic 2D Imaging Pulse Sequence

$$S(t) \propto \int M_T(\vec{r}) e^{i\vec{K}(t) \cdot \vec{r}} d\vec{r}$$

$$\vec{K}(t) \equiv \gamma \int \vec{G}(t) dt$$

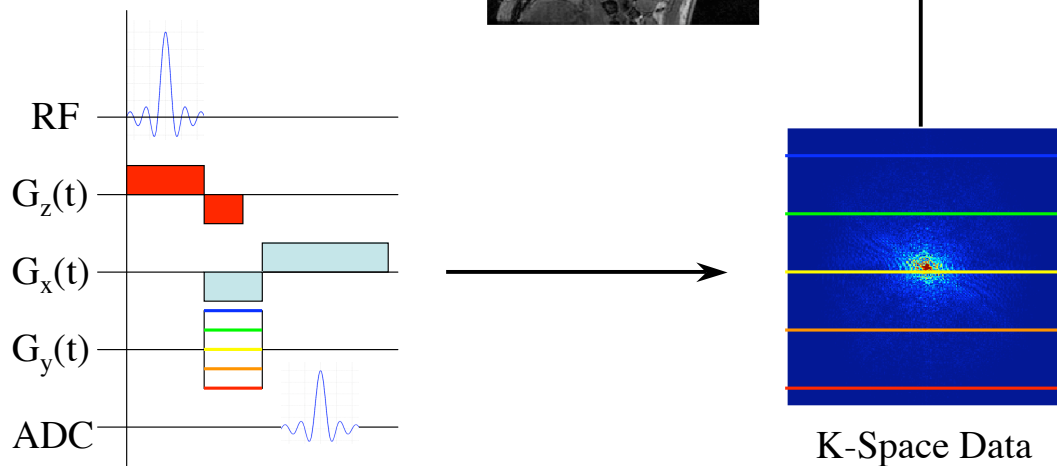


E. Wong, BE208, UCSD Winter 2008

Hardware Overview

Three fields:

- Main Field (B_0)
 - Polarize Spins
- Gradient Fields ($G_{[XYZ]}$)
 - Map space into frequency
 - $\frac{\partial B_z}{\partial [XYZ]}$
- RF Fields (B_1)
 - Change the latitude or zenith angle of ('tips') spins

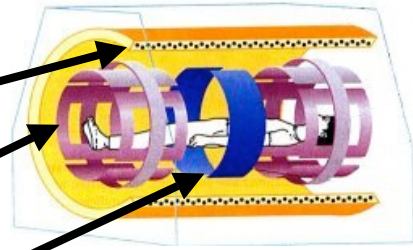

E. Wong, BE208, UCSD Winter 2008



Main Field (B_0)

How do we decide on B_0 ?

$$\Delta E = \gamma h B_0$$

$$M_0 \propto \Delta E$$

∴ Bigger is better!

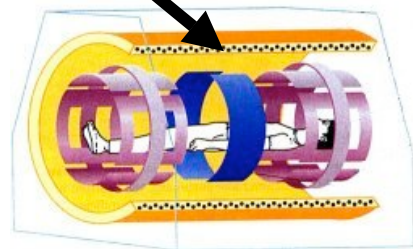

3T Human @UCSD.

7T Rodent @UCSD

7T Human @U.Minn.

9.4T Human @UIC

Main Field (B_0)

Energy in a Magnetic Field:

$$E = \frac{1}{2\mu_0} \int B^2 dV$$

For $B=3T$ over $1m^3$:

$$E = \frac{1}{2(1.25 \times 10^{-6})} 9 = 3.6MJ$$


= dropping a 1000Kg car from 360m high

Heat of Vaporization of He = 2.5KJ/l

During a quench, R goes from 0 to $\sim 100\Omega$,
 $I \sim 100A$, so $P=I^2R \sim 1MW$

- A quench can boil off $3.6MJ/2.5KJ/l=1400l$ of Helium
- • in $3.6MJ/1MW \sim 3.6s !!!$

E. Wong, BE208, UCSD Winter 2008

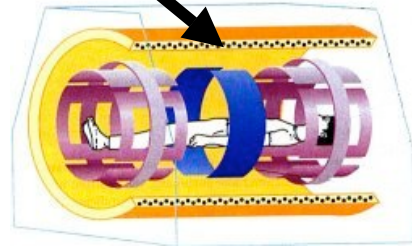

Main Field (B_0)

Wavelength (λ) of RF:

In Vacuum:



5m @ 60MHz (1.5T)

1m @ 300MHz (7T)

In Brain:

12cm @ 300MHz (7T)¹

When λ is not large compared to object, standing waves form. This is referred to as Dielectric Resonance. RF inhomogeneity during receive is fixed by scaling, but RF transmit inhomogeneity is much more difficult to address.

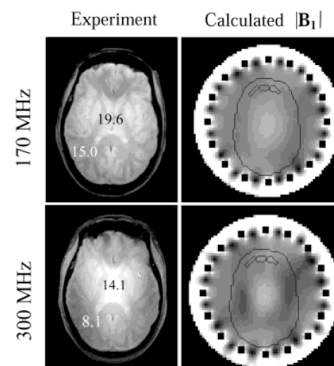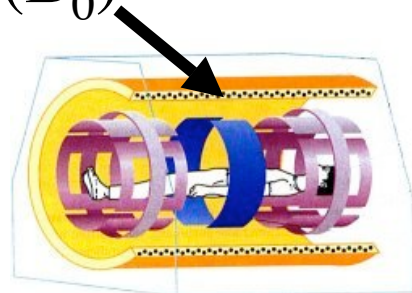


¹Vaughan et al, MRM 46 p24 2001

E. Wong, BE208, UCSD Winter 2008

Gradient Fields

$$G_X \equiv \frac{\partial B_Z}{\partial X} \quad G_Y \equiv \frac{\partial B_Z}{\partial Y} \quad G_Z \equiv \frac{\partial B_Z}{\partial Z}$$

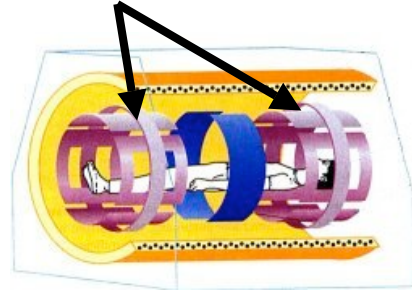

How big do gradient fields need to be?

- Shortest soft tissue $T_2^* \sim 1\text{ms}$
- For 0.2mm resolution in 1ms:

$$G = \frac{K_{\max}}{\gamma T} = \frac{(0.5/0.2\text{mm})}{(4257\text{Hz/G})(1\text{ms})} \approx 5\text{G/cm}$$

- To fill 1m^3 with 5G/cm gradients in 0.2ms requires:

$$P = \frac{E}{T} = \frac{1/2\mu_0 \int B^2 dV}{T} \approx \frac{1/2\mu_0 (B_{\text{RMS}}(5\text{G/cm}))^2 (1\text{m}^3)}{0.2\text{ms}} \approx 500\text{KW} \rightarrow \text{About 3 simultaneous Rolling Stones concerts}$$

- Modern gradient systems are also up against dB/dt limits for peripheral nerve stimulation ($\sim 50\text{T/s}$)
- For diffusion or ultrashort T_2^* imaging, more G would help a lot


E. Wong, BE208, UCSD Winter 2008

RF Fields

How big do RF fields need to be?

- Shortest soft tissue $T_2^* \sim 1\text{ms}$
- To flip spins by 90° (0.25 rotations) in 0.2ms:

$$B_1 = \frac{0.25}{\gamma T} = \frac{0.25}{(4257\text{Hz/G})(0.2\text{ms})} \approx 0.24\text{G}$$

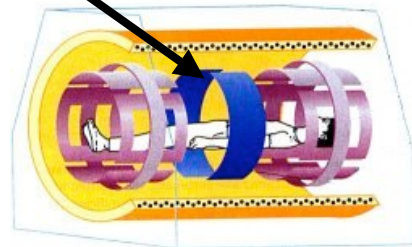


- RF power absorption by the body is a complex function of frequency, conductivity, and geometry, but at 0.24G, approximately 200W/Kg are deposited in human tissue at 3T. Thus, for a 100Kg person, the RF system must supply 20KW of deposited power, or about 40KW of total power, assuming 50% losses to the coil, cabling, reflections, and radiation.

E. Wong, BE208, UCSD Winter 2008

Quadrature Reception

Original quadrature detection: separate coils and A/D for I and Q

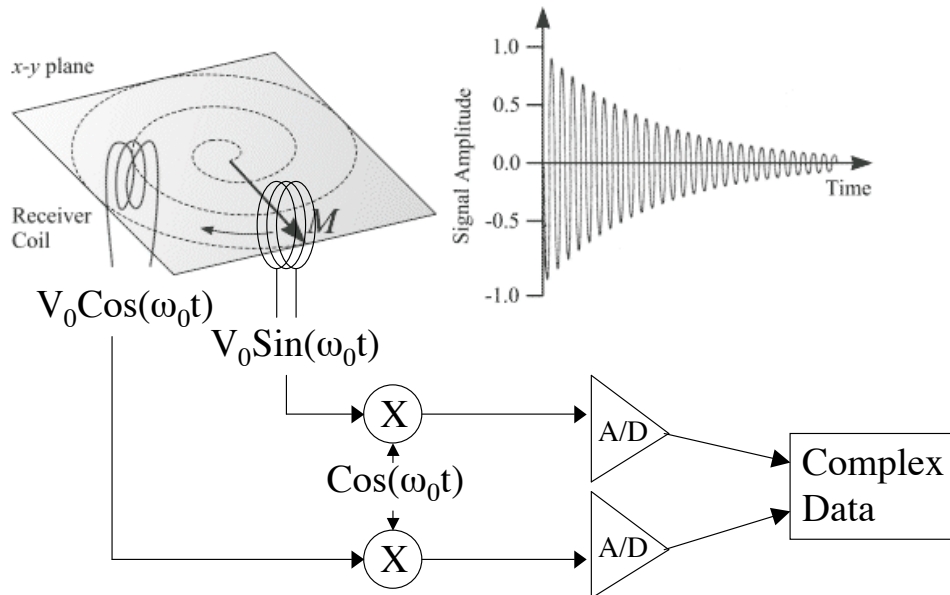


E. Wong, BE208, UCSD Winter 2008

<http://www.easymeasure.co.uk/principlesmri.aspx>

Quadrature Reception

Because $\omega_0 \gg$ bandwidth, 2 coils are not needed for phase detection. However, second coil does increase SNR

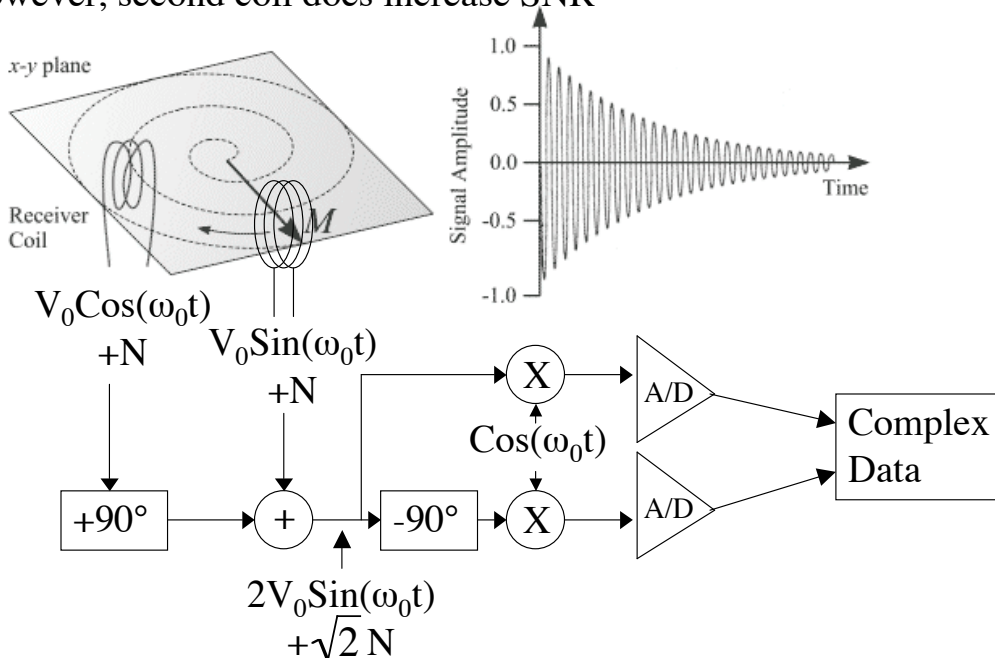


E. Wong, BE208, UCSD Winter 2008

<http://www.easymeasure.co.uk/principlesmri.aspx>

Quadrature Reception

Digital quadrature requires 2x faster sampling, but eliminates I/Q imbalance, and what happens to a DC offset in the A/D?

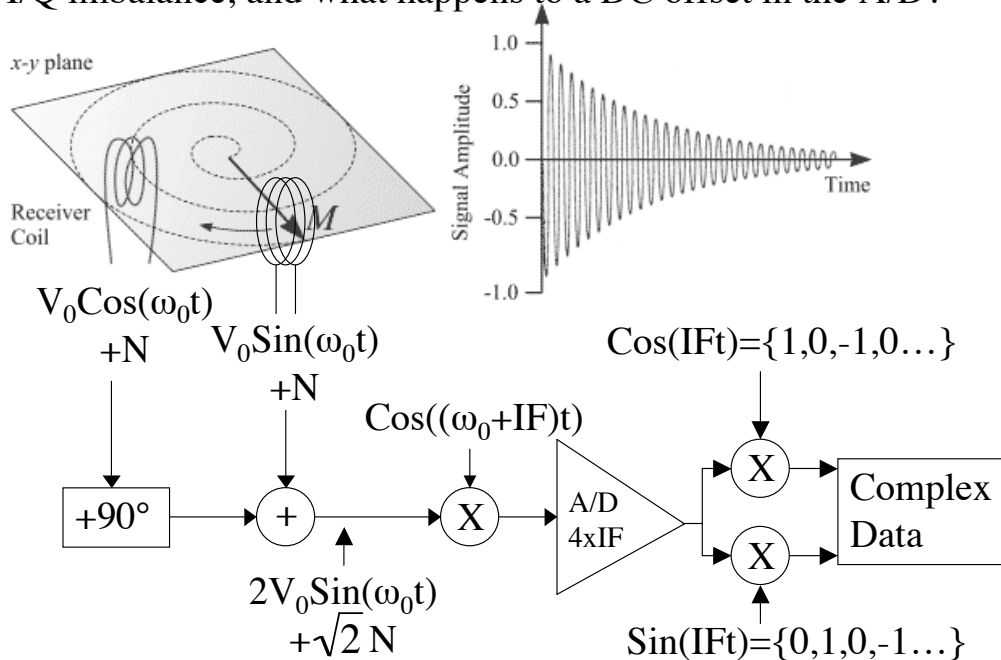

E. Wong, BE208, UCSD Winter 2008

<http://www.easymeasure.co.uk/principlesmri.aspx>

Quadrature Reception

Summary:

1. Quadrature RF coil is NOT needed to detect MR signal phase.
2. Quadrature RF coil improves SNR by $\sqrt{2}$
3. Digital quadrature detection:
 1. Eliminates I/Q imbalance
 2. Moves DC offset in ADC to edge of image
 3. Requires 2x higher sampling rate than separate I/Q